

All Stainless Steel Toploading Scale

- Heavy Duty




Model	GS-1200	GS-3000	GS-6000	GS-12K
Capacity	1,200 g / 2.64 lb	3,000 g / 6.6 lb	6,000 g / 13.2 lb	12 kg / 26.4 lb
Readability	0.2 g / 0.0005 lb	0.5 g / 0.001 lb	1g / 0.002 lb	0.002 kg / 0.005 lb
Divisions	6,000	6,000	6,000	6,000
Weighing Units / Functions	g / lb / lb : oz			
Stabilization Time (seconds)	< 2			
Tare Range	To capacity by subtraction			
Power Source	Built-in rechargeable battery or external power adaptor (included)			
Construction	Stainless steel pan and housing			
Display	0.75 inches (19 mm) wide viewing angle LCD			
Pan Size (w x d)	8.25 x 8.25 inches (210 x 210 mm)			
Dimensions (w x h x d)	9.1 x 3 x 12.2 inches (230 x 75 x 310 mm)			
Operating Environment	32° ~ 104° F non condensing R.H. ≤ 85%			
Net Weight	8.15 lb (3.7 kg)			
Shipping Weight	12.3 lb (5.6 kg)			
Nema / IP rating	IP 65			
Options	Spirit level, EL backlight			

Features

- All stainless steel housing and pan
- Heavy duty construction
- Sealed electronics
- Low profile, compact size
- Reads in grams, pounds and pounds: ounces
- Built-in rechargeable battery or external power adaptor
- Accumulation function
- Zero tracking
- Automatic power save
- Low battery indicator
- Auto-calibration function
- Adjustable stainless steel feet with rubber inserts
- Wide angle LCD display

Benefits

- Easy to clean for food processing or harsh environments
- Will withstand harsh industrial operation
- Improved water and dust resistance
- Uses less counter space
- Flexibility of operation
- Portability - battery lasts a minimum of 150 hours
- Allows you to add together consecutive weights to arrive at a total
- Assures that you always start weighing at zero
- Conserves battery power
- Alerts you to charge the battery, saving downtime
- Ensures accuracy
- Balance remains level for accurate results on uneven working surfaces - Anti-slip
- Can be seen from a wide viewing angle

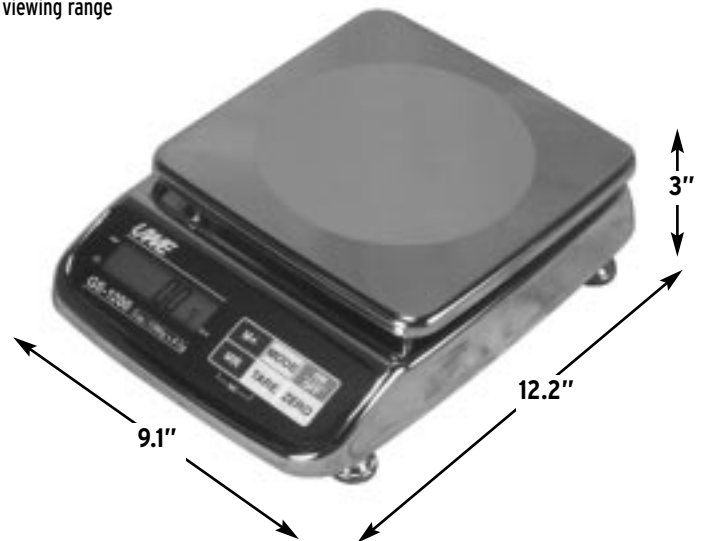

Intelligent Weighing Technology, Inc.
 3401 West Fifth Street # 210 • Oxnard CA 93030
 Toll Free: (866) 920-3000
 Tel: (805) 382-8731 • Fax: (805) 382-8747
www.intelligentwt.com • sales@intelligentwt.com